

Accessories

Dew-point Monitor (portable)



Models with optional portable dew-point monitor is convenient to test dew-point temperature of different machines.

Function	Specification	
Display	Digital and Real-time Curve Display supports English\Chinese\Japanese\Korean version.	
Range	Pressure	-50.....+50°C td
	Temperature	-0.1.....1.5MPa td
	Condition	-30.....+50°C
Accuracy	Dew point	±2°C td@-50°C td
	Pressure	±0.005MPa
	Temperature	±0.3°C
	Condition	Temp.: 23°C±3°C Humidity: <90% no condensation
Other Units	g/m ³ ,mg/m ³ ,ppmv,g/kg	
Data Record	Memory space	4G, data can be exported by memory card
	Number of files	≤512 files
	Medium	SD card

High Efficiency Particulate Absorbing Filter HEPA(0.3µm)




For optical model, These two devices are optional to ensure no material contamination.

Optical Material Tank (3µm)



Optical Powder-removing Hopper

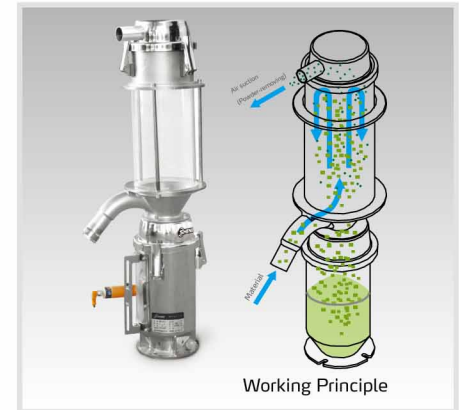

Optical SCD-OP series together with powder- removing hopper which can help avoid powder in the materials; all material contact surfaces are stainless steel mirror polished.


Oil Filter




Oil filter is optional to filter the oil substance in return air for honeycomb protection.

Model	Applied to	Cooling water flow(L/min)	Cooling water temperature(°C)
EOF-30	SD-40H~120H	5	7~15
EOF-150	SD-150H / 200H	10	
EOF-300	SD-300H / 400H	20	
EOF-500	SD-700H	30	
EOF-1000	SD-1000H	65	
EOF-2000	SD-1500H/2000H	130	
EOF-3000	SD-3000H	185	
EOF-4000	SD-4000H	245	

Cyclone Dust Collector

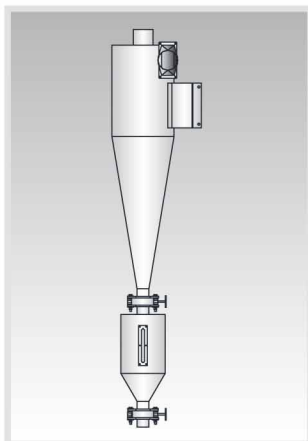

ACF-5"~12"

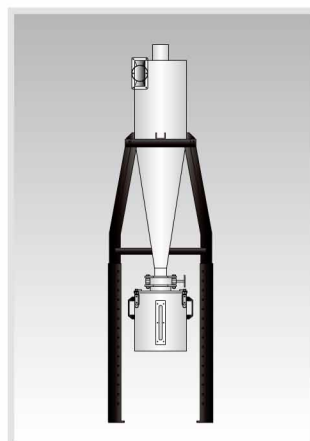

ACF-3"~4"

Cyclone dust collector is used to collect the dust in return air.

Model	Applied to
ACF-3"	SD-300H / 400H
ACF-4"	SD-700H
ACF-5"	SD-1000H
ACF-8"	SD-1500H/2000H/3000H
ACF-12"	SD-4000H

Shini Group

Addr: No. 23, Minhe St., Shulin Dist.,
New Taipei, Taiwan

Tel: +886 2 2680 9119

Fax: +886 2 2680 9229

Email: shini@shini.com

Factories:

- Taiwan
- Dongguan
- Pinghu
- Ningbo
- Chongqing
- Pune